


FRONT

Shock Tower SCREW: 10mm SHIM: 3.3mm ☐ Alu ☒ Ti ☐ Steel Bulkhead Stiffener ☐ Graphite 1mm ☒ Graphite 2mm Upper Bulkhead Ball: IF14 Ti (M) 0 Shim: 0.5 1.3mm Cams ☐ High ☒ Low Spool cup ☒ Alu ☐ Steel Blade ☒ Black ☐ White 38.5 mm 39.5 mm	Steering Block ☒ Graphite ☐ Standard 0.3mm 0.6mm 0mm IF14 Ti (M) 0mm Ti 10mm C-Hubs ☐ Graphite ☒ Standard 0mm 0.1mm	Bell Crank ☒ 18.0mm ☐ 20.0mm IF14 Ti (M) 2.0mm 3.8mm IF14 Ti (L) Sus Arm ☒ Graphite ☐ Standard ☒ 53mm ☐ 55mm 1.0mm 0.3mm テフロン 1枚使用 SHIM: 0.5mm Roll bar linkage シャフトに干渉しない様に下を1mmカット SHIM: 0.5mm	Servo Horn Ball Position Horn type ☒ AXON/SANWA IF14 Ti (L) 4.0mm Servo: SANWA/LH2 (Servo mount) Ride Height: 4.6mm Droop: ☒ Arm lower end ☐ Sus pin center 6.2mm Toe Angle: out 1° Camber Angle: 1.5° Anti Roll Bar: ☒ 1.2 ☐ 1.3 ☐ 1.4 ☐ None Notes:	Rod End Ball Size ☒ SHS : Short neck ☐ MH ☐ SH SHOCK ABSORBER Spring: AXON HLS c2.7 Oil: AXON 32.5 Piston: ☐ 3H ☒ 4H Hole: 標準ピストン mm Others: Bladder: ☐ V1 ☒ V2 Others: ダンバートップ上にヨコモ内径10mm/0.05シム入れる。 Length: 7.2mm Ball: ☒ Alu ☐ Steel ☒ Alu ☐ Steel
Wheel Hubs 0 mm 0.3 mm 3.5 mm 4.0 mm	Sus-Blocks FF: ☐ A ☐ B ☐ C in out FR: ☐ A ☐ B ☐ C in out ☐ 1Pice ☒ Separate No. 3 FF: Spacer 0.5 mm FR: Spacer 0.5 mm	Motor mount & Rear stiffener ☒ None ☐ Aluminum ☐ Steel ☒ Aluminum ☐ Brass Sus Arm ☒ Graphite ☐ Standard ☐ RTC ☐ 53mm ☒ 55mm ☐ 57mm 1.8mm 0.3mm テフロン 1枚使用 SHS 0.2mm Roll bar linkage SHIM: 1.0mm	Ride Height: 4.8mm Droop: ☒ Arm lower end ☐ Sus pin center 2.3mm Toe Angle: 2.2° Camber Angle: 2° Anti Roll Bar: ☒ 1.2 ☐ 1.3 ☐ 1.4 ☐ None Notes:	SHOCK ABSORBER Spring: AXON HLS c2.7 Oil: AXON 32.5 Piston: ☐ 3H ☒ 4H Hole: 標準ピストン mm Others: Bladder: ☐ V1 ☒ V2 Others: ダンバートップ上にヨコモ内径10mm/0.05シム入れる。 Length: 7.9mm Ball: ☒ Alu ☐ Steel ☒ Alu ☐ Steel

REAR

Shock Tower SCREW: 6mm SHIM: 0mm ☐ Alu ☒ Ti ☐ Steel Upper Bulkhead Ball: IF14 Ti (M) 0 Shim: 0.5 1.3mm Cams ☐ High ☒ Low Diff cup ☒ Alu ☐ Steel Blade ☒ Black ☐ White 44.0 mm 44.5 mm	Rear Hub Carrier ☐ Graphite ☐ Standard IF14 Ti (M) 2.5mm Use to XRAY T4 0° Graphite Rear Hub 0mm Gear Diff Oil ☒ AXON 6000cst 1.4g	Motor mount & Rear stiffener ☒ None ☐ Aluminum ☐ Steel ☒ Aluminum ☐ Brass Sus Arm ☒ Graphite ☐ Standard ☐ RTC ☐ 53mm ☒ 55mm ☐ 57mm 1.8mm 0.3mm テフロン 1枚使用 SHS 0.2mm Roll bar linkage SHIM: 1.0mm	Ride Height: 4.8mm Droop: ☒ Arm lower end ☐ Sus pin center 2.3mm Toe Angle: 2.2° Camber Angle: 2° Anti Roll Bar: ☒ 1.2 ☐ 1.3 ☐ 1.4 ☐ None Notes:	SHOCK ABSORBER Spring: AXON HLS c2.7 Oil: AXON 32.5 Piston: ☐ 3H ☒ 4H Hole: 標準ピストン mm Others: Bladder: ☐ V1 ☒ V2 Others: ダンバートップ上にヨコモ内径10mm/0.05シム入れる。 Length: 7.9mm Ball: ☒ Alu ☐ Steel ☒ Alu ☐ Steel
Rear Body Mount Stay ☒ Graphite 3mm Bulkhead Stiffener ☐ Graphite 1mm ☐ Graphite 2mm Wheel Hubs <<4.0mm>>	Sus-Blocks ☒ Alu ☐ Brass RF: ☐ NA ☐ A ☐ B in out RR: ☐ NA ☐ A ☐ B in out No. 3 RF: Spacer 0.5 mm RR: Spacer 0.5 mm	TC10/2		

<<Balance Weight Setting>>

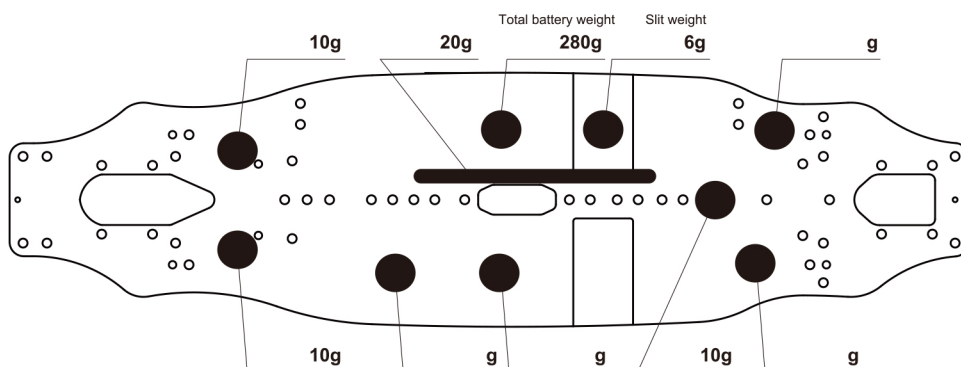

Total Car Weight: 1305g

Screw setting <<Button Head>>

Top deck 8pics:	6mm	☐ Alu ☒ Ti ☐ Steel
Upper bulkhead : FF 2pics:	8mm	☐ Alu ☒ Ti ☐ Steel
Upper bulkhead : FR 2pics:	8mm	☐ Alu ☒ Ti ☐ Steel
Upper bulkhead : RF 2pics:	8mm	☐ Alu ☒ Ti ☐ Steel
Upper bulkhead : RR 2pics:	10mm	☒ Alu ☐ Ti ☐ Steel
Front Shock tower 4pics:	5mm	☐ Alu ☒ Ti ☐ Steel
Rear Shock tower 4pics:	5mm	☐ Alu ☒ Ti ☐ Steel

Screw setting <<Flat Head>>

Lower bulkhead 8pics:	6mm	☐ Alu ☒ Ti ☐ Steel
Sus-blocks ALL:	6mm	☐ Alu ☒ Ti ☐ Steel
Bell crank post:	6mm	☐ Alu ☒ Ti ☐ Steel
Servo mount:	6mm	☐ Alu ☒ Ti ☐ Steel
Motor mount:	6mm	☐ Alu ☒ Ti ☐ Steel
Rear roll post:	10mm	☐ Alu ☒ Ti ☐ Steel

Notes:

- Spool & Diff cup is AXON
- Front drive shaft / BD11
- The ball end of the upper arm and toe rod uses IF14.
- All ball end balls use IF14 titanium ball.
- All titanium screws are AXON spring titanium screws.
- サスピン部分以外はすべてAXON M3シムを使用。(All AXON M3 shims are used except for the suspension pin part.)
- リアボディマウントはRC MAKER製を使用。(The rear body mount is made by RC MAKER.)

Main Chassis: ☒ Carbon ☐ AluminumTop Deck: ☒ 2.0mm Type-B

Motor: 17.5T

Spur Gear: 110T Pinion Gear: 38T

Battery: ORCA 6390

ESC: ORCA 0eI

Body: XTREME Twister UL

Wing: Twister UL

FRONT

Tire: SOREX 32R

Insert: AXON Soft

Wheel: AXON No3

Additive: マイティV3

Notes:

REAR

Tire: SOREX 32R

Insert: AXON Soft

Wheel: AXON No3

Additive: マイティV3

Notes: